


USE OF THE ANTIWAVE UNIVERSAL WALL GOAL

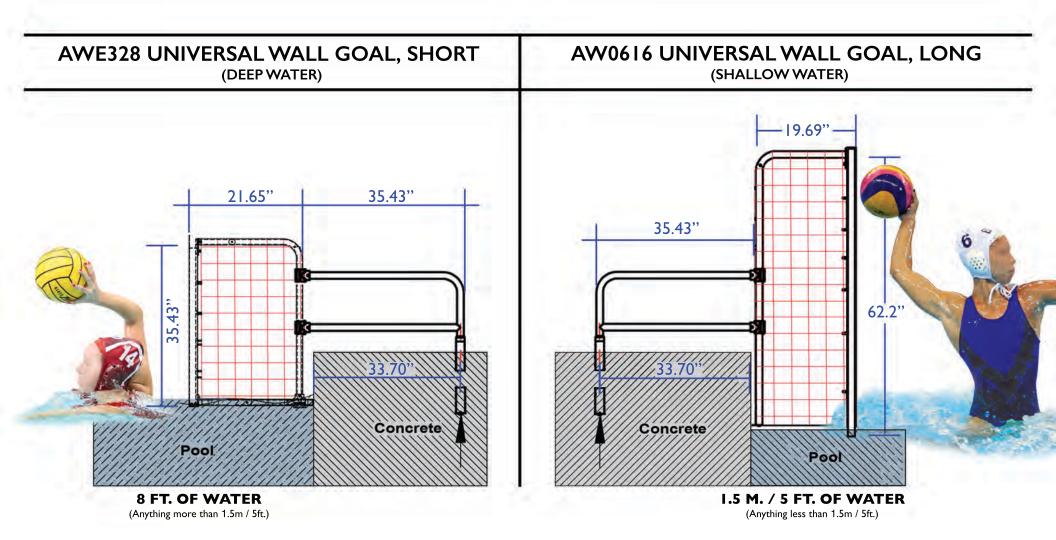

* Fina FR 9.5 - States underside of crossbar must be 0.9m above water surface when water is 1.5m or more in depth, and 2.4 meters above bottom of pool when depth is less that 1.5 meters.